


Multi-Step Cam Switch

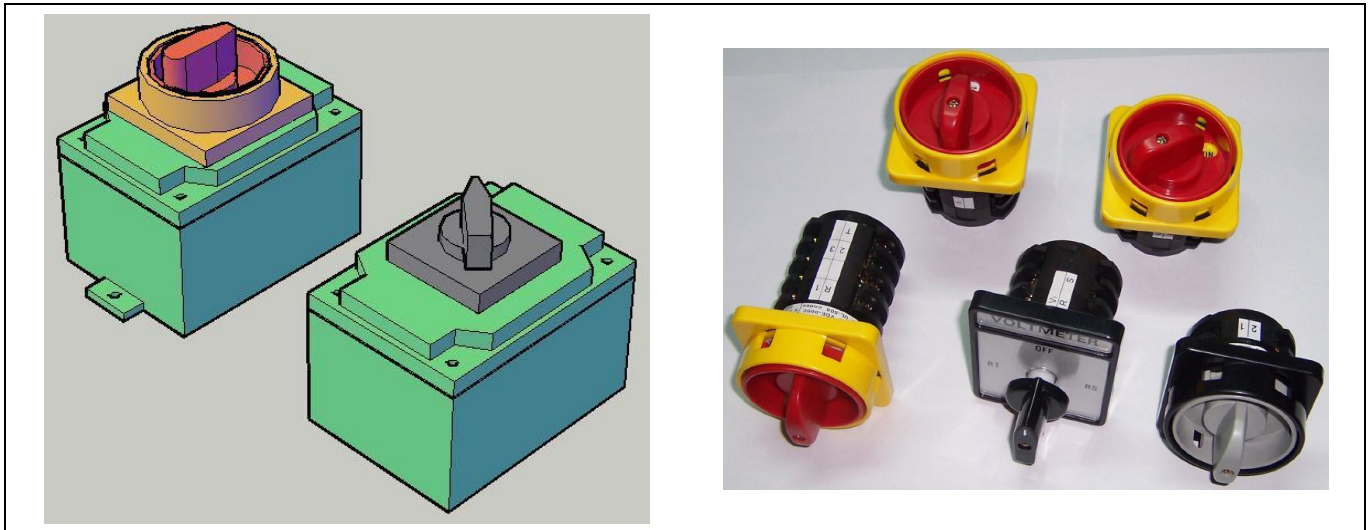

Standard Specification


Elements of contact point		AG
Contact rating		10AMP, 16AMP, 20AMP, 25AMP / 600VAC
Safety approval		20AMP / 600V (UL, CE)
Dielectric strength		2500VAC 1MIN
Mechanical life		1,000,000 Cycles
Electrical life		100,000 Cycles
Ambient temperature	Storage	-30~+70 deg C
	Operating	-20~+55 deg C
Number of stages		1~12 Stages
Switching positions		2~12 Positions

For Motor Load


Rated Power / Conventional Thermal Current	1 Phase		3 Phase		
	120VAC	220VAC	240VAC	380VAC	600VAC
16AMP	1.5HP	2.0HP	2.5HP	4.0HP	6.0HP
20 / 25AMP	2.0HP	3.0HP	4.0HP	6.0HP	10.0HP

Dimensions (unit : mm)


Total Number of Stages	1	2	3	4	5	6	7	8	9	10	11	12
Length L1	37	48.5	60	71.5	83	94.5	106	117.5	129	140.5	152	163.5

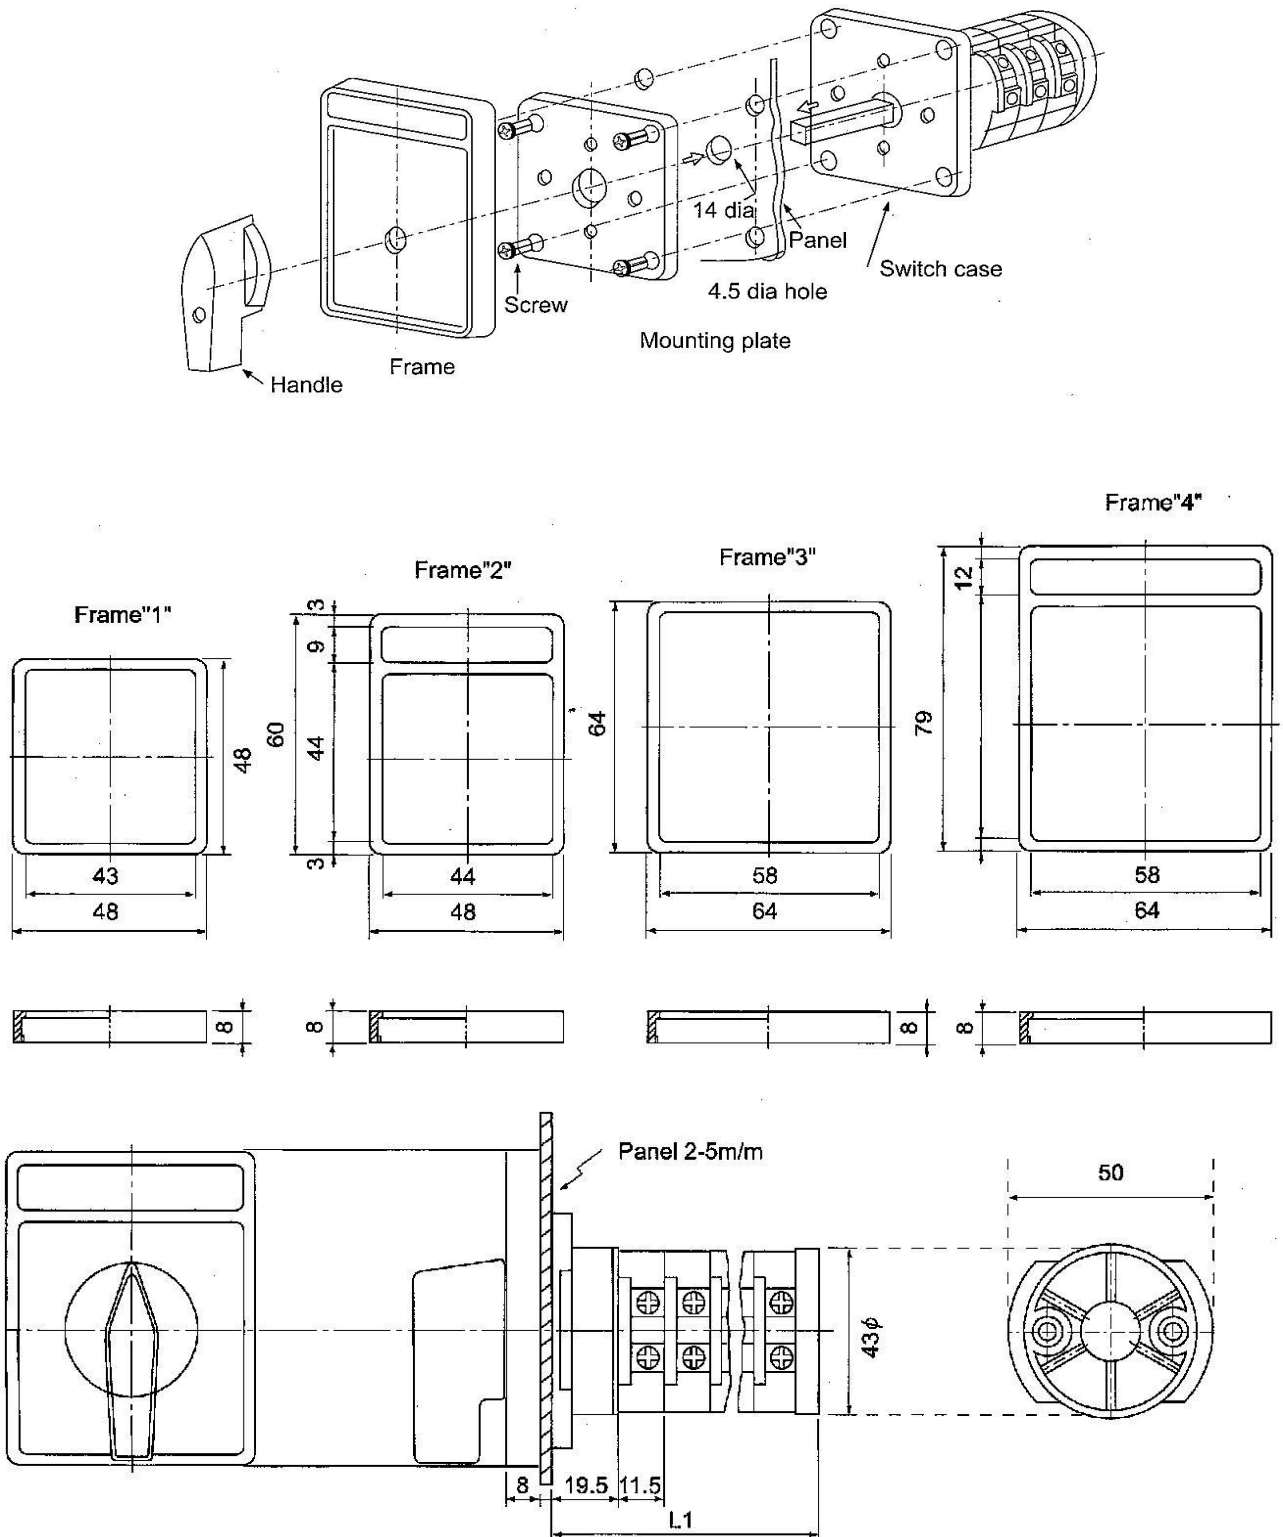


Case Dimensions (unit : mm)

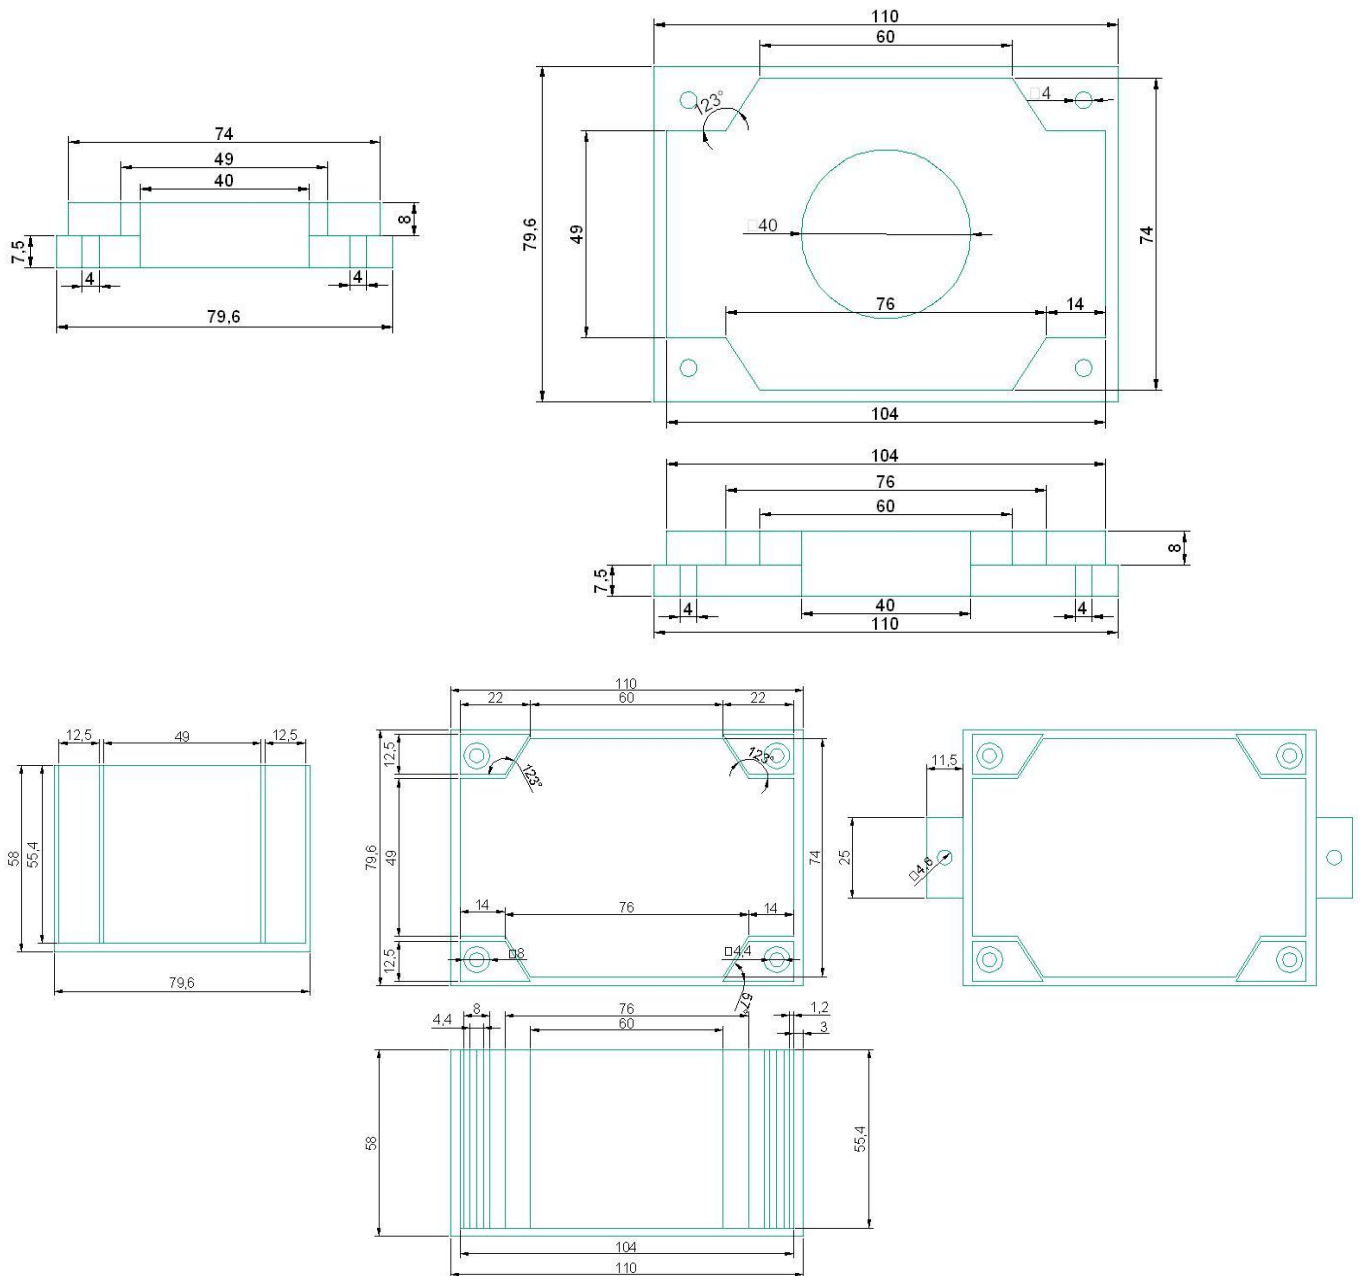

Panel Cut-Out




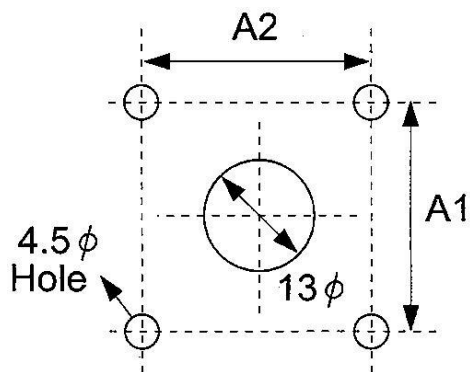


Frame Type	A1	A2
Frame 1 & 2	36	36
Frame 3 & 4	48	48



※ Optional finger protection terminal covers

Operational Position



Name Plate

ON/OFF & Multi-Step Switches	
Voltmeter Switches	
Ammeter Switches	
Motor Control Switches	1Φ或3Φ正逆開關 變極開關 正逆加變極(1) 正逆加變極(2)

※ Various specifications for different applications.

※ For other special specifications upon customer's request.

Contact

Taipei World Trade Center

Add: 3C25, Taipei World Trade Center, No. 5, Sec. 5, Hsin Yi Rd. Taipei Taiwan, R.O.C.

Tel: 886-2-27206601 (Rep.)

Fax: 886-2-23455120

E-mail: gitta@ms9.hinet.net

<http://www.maxthermo.com>

Factory

Add: 11F., No.168, Jiankang Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Tel: 886-2-22287950 (Rep.)

Fax: 886-2-22286140

Thailand Office - THAI MAXIMUM ELECTRONIC CO., LTD

Add: 86/132-133 m.7 Samaedum Bangkoontien Bangkok 10150 Thailand.

Tel: +662-415-8318 , +662-417-2548-49

Fax: +662-415-8798

<http://www.thaimaximum.com>