


## Human Machine Interface

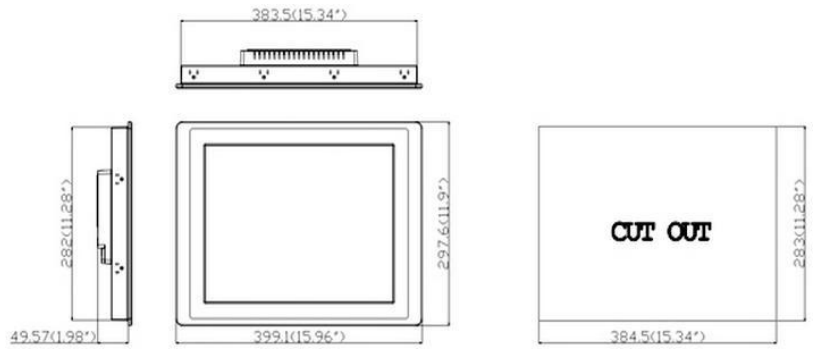

Unit : mm

### Standard Specification

Display Information		Touch screen	
Size	15.0"	5 wires analog resistive	
Max. Resolution	1024x768	CPU	
Type	TFT LCD	RISC 32 bits	
Max. Colors	65,536 Colors	Flash Memory	
Backlight Type	LED	8 MB NOR Flash	
Backlight Life (hr)	50,000 Hrs	Battery Backed Memory	
Luminance (cd/m2)	350	128 KB (1024 KB optional)	
Communication Interface		Working Memory	
Micro-SD Slot	Yes	64MB	
USB Client	Yes	NAND Flash	
USB Host	Yes	128MB	
Serial	COM1: RS232/422/485	Function Keys (optional)	
	COM2: A-RS422/485	--	
	B-RS232/485	Dimension WxHxD (mm)	
	C-RS232 with RTS&CTS	399.1x297.6x55	
	COM3: RS232	Cutout Dimension WxH (mm)	
Ethernet	Yes (10/100M)	384.5x283	
Power		Net Weight (kg)	
Supply Voltage	24VDC ±10%	2.9	
Consumption	25W		
Environment			
Operating Temperature	0~50°C (32~120°F)	CE	EN61000-6-2, N61000-6-4
Relative Humidity	10~90% RH @ 0~50°C, non-condensing	Ingress Protection	NEMA4, IP66
Shock (optional)	10~55 Hz (X,Y, Z direction, 1G, 30 minutes)	Cooling	Natural Cooling
EMI	FCC Part 15 Class A		