

Digital Present Counter




Application

Plastic, rubber, equipment	Semiconductor electronic components industry	Food related industry
Injection molding machinery Extruding machinery Mold temperature controllers Vacuum forming Blow molding (Thermo foaming)	Preheater Cleaning equipment Mold equipment Bonding machine Diffusion equipment	Refrigerating machine (General, for fishing vessel) Dryer Humidifier Bakery, confectionery equipment
Electric furnaces	Pottery manufacturing Ceramic and Glass industry	Packing machine industry
Baking furnace Heavy oil, gas furnaces Incinerator Aluminum, tin, lead, zinc melting furnace Vacuum furnace	Ceramic industry Glass industry Porcelain enameling Grind stone manufacturing	Bag-making machinery Filling packing machinery Hot blast sealing Shrinking packing machinery


Features

- 1. Surface (N Type) or Flush (Y Type) is by order.
- 2. TH2C : 2 Digits ; TH3C : 3 Digits.

Panel Function

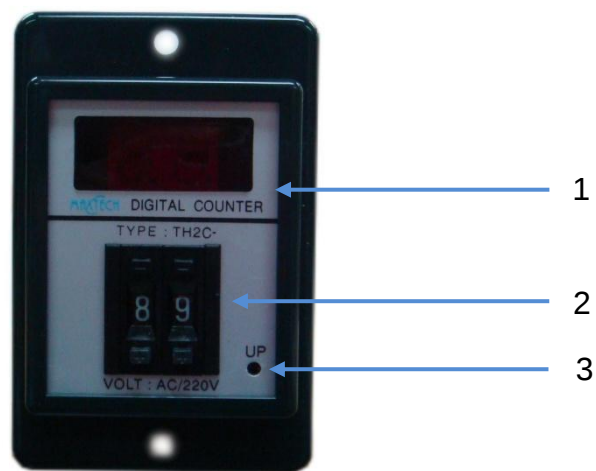

MARKS / DESCRIPTIONDESCRIPTION		
1	Digital Indicator	2 Digits. LED Display
2	Main Control Setting	
3	Main Control Indicator	Red LED Twinkling Shows "OFF"

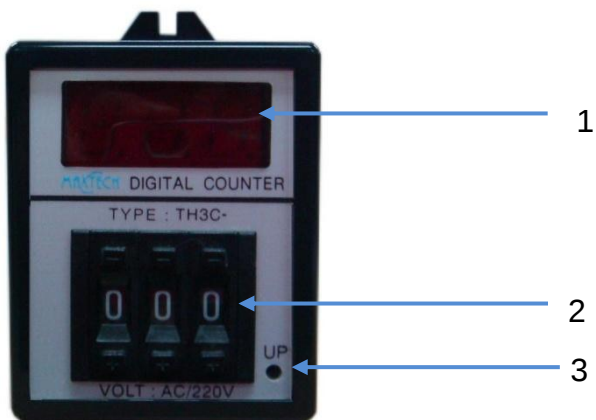

MARKS / DESCRIPTIONDESCRIPTION		
1	Digital Indicator	3 Digits. LED Display
2	Main Control Setting	
3	Main Control Indicator	Red LED Twinkling Shows "OFF"


Standard Specification

Model		TH2C		TH3C	
Products					
Type		Surface	Flush	Surface	Flush
Dimension		60H×48W×79D	88H×58W×79D	60H×48W×79D	88H×58W×79D
Mounting & Socket	Surface(-N)	8PFA	×	8PFA	×
	Flush (-Y)	×	US08 or P3G-08	×	US08 or P3G-08
Range		1. Count Input : Contact I/P 2. Counting Speed : 20CPS max 3. Reset System : Power off rest		1. Count Input : Contact I/P 2. Counting Speed : 200CPS max 3. Reset System : Power off rest	
Rated Voltage		DC(V): 12, 24 AC(V): 12, 24, 110, 220, 240, 50/60Hz		DC(V): 12, 24 AC(V): 12, 24, 110, 220, 240, 50/60Hz	
Contact	Model	TH2C-N	TH2C-Y	TH3C-N	TH3C-Y
	Time Limit 1C	5A	5A	5A	5A
Mechanical Life		5×10 ⁶ TIMES		5×10 ⁶ TIMES	
Electrical Life		10 ⁵ TIMES		10 ⁵ TIMES	
Accuracy		0		0	
Resetting Time		0.5 SEC MAX		0.5 SEC MAX	
Consumed Power		3VA		3VA	
Ambient Temperature		-10℃ ~+55℃		-10℃ ~+55℃	
Ambient Humidity		45~85% RH		45~85% RH	
Weight		230G		230G	


External Dimension

Unit : mm

Surface

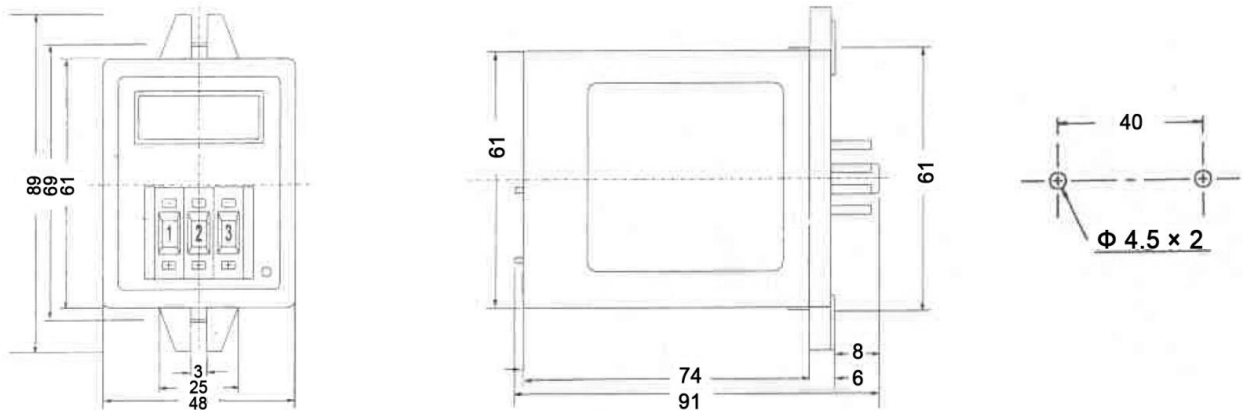


Flush

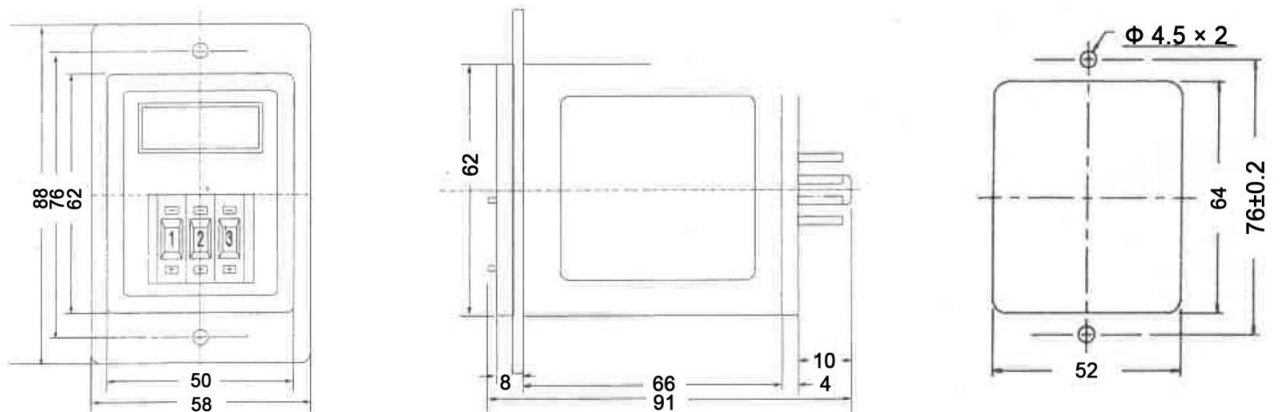





Socket & Wiring Diagram

Unit : mm

8PFA

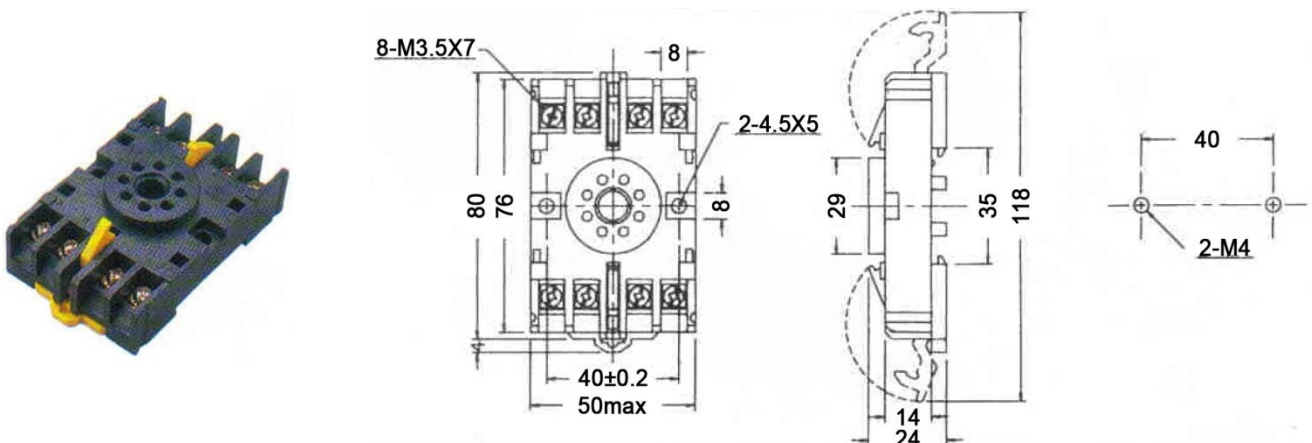




P3G-08



US08



Φ 31.5



Contact

Taipei World Trade Center

Add: 3C22-23 & 3C25-26, Taipei World Trade Center, No. 5, Sec. 5, Hsin Yi Rd. Taipei Taiwan, R.O.C.

Tel: 886-2-27206601 (Rep.)

Fax: 886-2-23455120

E-mail: gitta@ms9.hinet.net

<http://www.maxthermo.com>

Factory

Add: 11F., No.168, Jiankang Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Tel: 886-2-22287950 (Rep.)

Fax: 886-2-22286140

Thailand Office - THAI MAXIMUM ELECTRONIC CO., LTD

Add: 86/132-133 m.7 Samaedum Bangkoontien Bangkok 10150 Thailand.

Tel: +662-415-8318 , +662-417-2548-49

Fax: +662-415-8798

<http://www.thaimaximum.com>