


精簡型人機介面


特點:

- 超快2秒開機,超強運算能力,超低電力消耗
- 觸控精準,功能強大,簡單易學
- 節能環保,性價超值,精巧耐用
- 經濟實用型人機最好選擇


MA2100

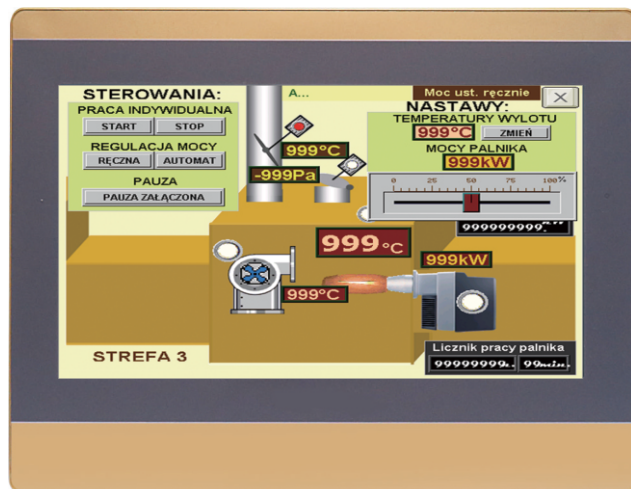

MA2070

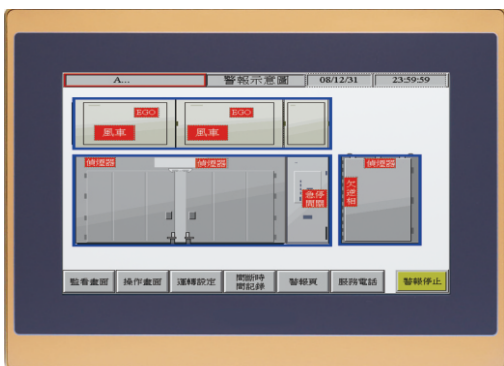

MA2043

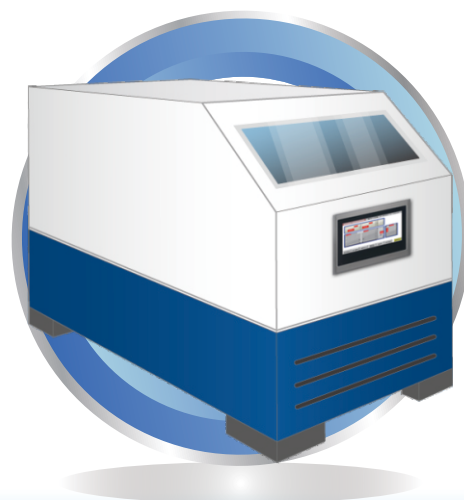

Maxthermo Touches Your Heart , Maxtech Services Your Mart
極大品質 永遠堅持 , 極大服務 全球遍佈



規格

Model Name	MA2043	MA2070	MA2100
Products			
Sub-models	20ST / 20FT	30ST / 30FT	30ST / 30FT
View Size	4.3" diagonal	7.0" diagonal	10.2" diagonal
Display Type	TFT LCD with LED Backlight , 16-bit Colors		
Backlight Life (hr)	20000		
Display Luminance	350 (cd/m²)	350 (cd/m²)	250(cd/m²)
Max. Resolution	480*272	800*480	1024*600
CPU	RISC ARM9 32Bit		
Touch Panel	4-wire Analog Resistive Type		
Backup SRAM	128KB (optional: 1MB)		
Working Memory	64MB		
AP Max Size for Memory	20MB		
Data File Memory	64MB		
Real-Time Clock (RTC)	YES (Unchargeable Battery type, 3 years battery life)		
Quantity for SCADA	Maximum: 30 Pages		
Quantity for Macro Commands	Maximum: 100 Lines		
Micro SD Slot	N/A		
USB Client	YES (USB 2.0)		
USB Host	YES (USB 2.0)		
COM1	RS232		
COM2	N/A	RS422/485	
COM3	RS485 (5Pin Terminal)	RS485 (DB9)	
Ethernet	N/A		
Front Function Keys	20ST: N/A, 20FT: YES (F1 ~ F5)	30ST: N/A, 30FT: YES (F1 ~ F6)	30ST: N/A, 30FT: YES (F1 ~ F7)
Front USB Host Port	N/A (optional)		
Power Supply Voltage	12~24VDC ±10%		
Power Consumption	2W	3W	3.5W
Operating Temp.	-10°C~50°C (Optional: -30°C~70°C)		
Relative Humidity	10%~90%		
Shock (Operation)	10 ~ 55Hz (X, Y, Z direction, 1G, 30 Mins shock testing)		
EMI	FCC Part 15 Class A		
CE	EN61000-6-2, EN61000-6-4		
Ingress Protection	IP65		
Cooling	Natural Cooling		
Dimensions (WxHxD)Unit : mm	129.0 x 103.0 x 26.3	203.5 x 149.0 x 33.0	270.1 x 212.1 x 42.5
Cutout Dimensions (WxH)Unit : mm	119.0 x 93.0	192.0 x 138.5	259.5 x 201.5
Net Weight (kg)	0.35	0.65	1.2

Maxthermo Touches Your Heart , Maxtech Services Your Mart

極大品質 永遠堅持 , 極大服務 全球遍佈

聯絡資訊

總公司

地址：新北市中和區建康路 168 號 11 樓

電話：(02)2228-7950 (代表號)

傳真：(02)2228-6140

E-mail：service@maxthermo.com.tw

Web：www.maxthermo.com.tw

台中公司

地址：台中市南屯區大墩7街5號4樓

電話：(04)2471-1083

傳真：(04)2471-1121

台南公司

地址：台南市仁德區義林路 145 巷 26 號

電話：(06)270-1271 (代表號)

傳真：(06)270-2062